



Brand: BendPak

Model(s): XPR-12FD / XPR-12FD-LWB

Description: 12,000-Lb. Capacity, Floorplate, Direct-Drive

The Perfect Addition to your Shop

Our newest line of XPR-Series 2-Post lifts offers a wide selection of durable, safe and reliable systems for virtually every lifting application. Powerful and secure, BendPak's XPR-12FD in particular has an incredibly rapid lift speed and a robust menu of features to increase efficiency and productivity, but with fewer serviceable parts and reduced necessary maintenance. The results are lower operating expenses and higher productivity. If you're looking to make more money in less time than ever before, you'll find that the new XPR-12FD lift is the perfect addition to your shop—especially when you work with heavier vehicles that require larger lifting capacities.




But just because this heavy-lifter model was designed for the big stuff doesn't mean it can't handle your light-duty work as well. This two-post model easily has the capacity to lift your largest full-sized pickups and commercial vehicles, yet still provide specific capability for sport and compact cars, both foreign and domestic. The XPR-12FD is a 12,000-lb. maximum capacity, open-top lift with full-reach arms that collapse to standard lengths and lower lift pads that clutch standard passenger automobiles, yet still handle the big guys too. We also were thoughtful enough to place the columns wider apart for vehicles with fixed towing mirrors. Sound complicated to operate? Don't worry. When it comes to ease of use, our dual-synchro equalization system and user-friendly controls are the stuff of legends.

Features

- ETL approved
- 12,000-lb lifting capacity
- Open-top eliminates overhead obstruction
- Wide drive-thru configuration
- Single-piece columns
- Single-point safety release
- Oversized 53" tall carriage for superior strength and durability
- Electric / hydraulic power system
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Safety locks in each column spaced every 3"
- Automatic arm restraints
- Heavy-duty 1/2" aircraft-quality equalizer cables
- Oversized cable sheave diameter reduces cable fatigue
- Versatile drop-in contact pads with stackable 8-piece truck and van adapters
- Triple-telescoping, low-profile arms



FLOORPLAN / SPECIFICATIONS

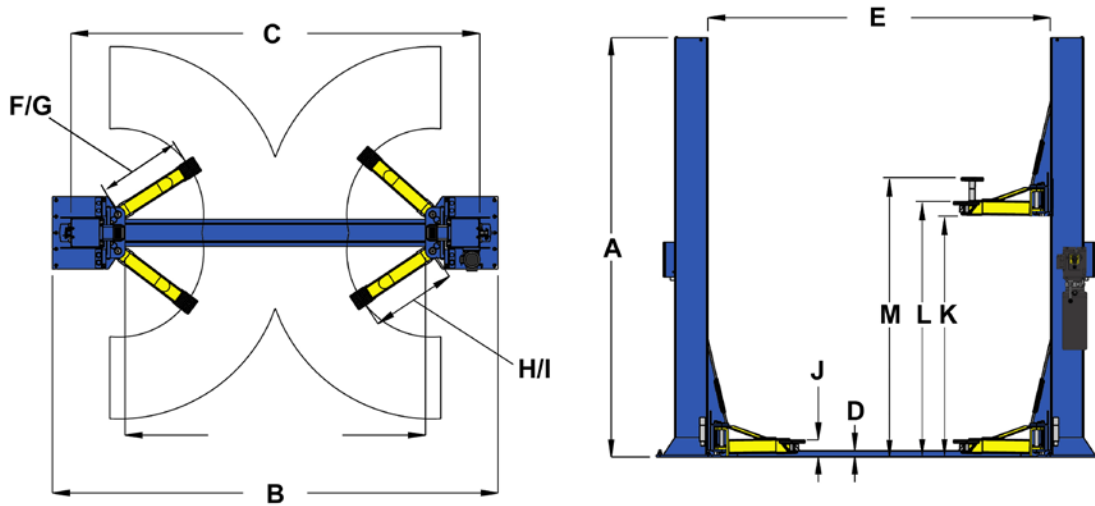

MODEL	XPR-12FD	XPR-12FD-LWB
Lifting Capacity*	12,000 Lbs. / 5443 Kg.	12,000 Lbs. / 5443 Kg.
*Max Capacity / Front Axle	6,000 lbs. / 2722 Kg.	6,000 lbs. / 2722 Kg.
*Max Capacity / Rear Axle	6,000 lbs. / 2722 Kg.	6,000 lbs. / 2722 Kg.
A - Height Overall:	144" / 3403 mm.	144" / 3403 mm.
B - Width Overall (Outside of Base Plate):	155" / 3937 mm.	155" / 3937 mm.
C - Width (Outside of Columns):	146" / 3708 mm.	146" / 3708 mm.
D - Cover Height:	2" / 51 mm.	2" / 51 mm.
E - Inside Columns:	118" / 2997 mm.	118" / 2997 mm.
F - Reach (Front Arm Min.):	39" / 991 mm.	35-1/2" / 902 mm.
G - Reach (Front Arm Max.):	59" / 1499 mm.	71-1/2" / 1816 mm.
H - Reach (Rear Arm Min.):	39" / 991 mm.	35-1/2" / 902 mm.
I - Reach (Rear Arm Max.):	59" / 1499 mm.	71-1/2" / 1816 mm.
J - Min. Pad Height:	5" / 127 mm.	5" / 127 mm.
K - Rise:	69" / 1753 mm.	69" / 1753 mm.
L - Max Lift Height (Pad Only):	74" / 1880 mm.	74" / 1880 mm.
M - Max Lift Height (6" Adapter):	80" / 2032 mm.	80" / 2032 mm.
N - Drive-Thru Clearance:	103" / 2616 mm.	103" / 2616 mm.
Motor (*)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.
Time of full Rise:	55 Seconds	55 Seconds
Max Load Per Arm:	3,000Lbs. / 1361 Kg.	3,000Lbs. / 1361 Kg.
* Special Voltages Available Upon Request.		
The design, material and specifications are subject to change without notice.		